


The Preferred Choice

for Digital Indicators

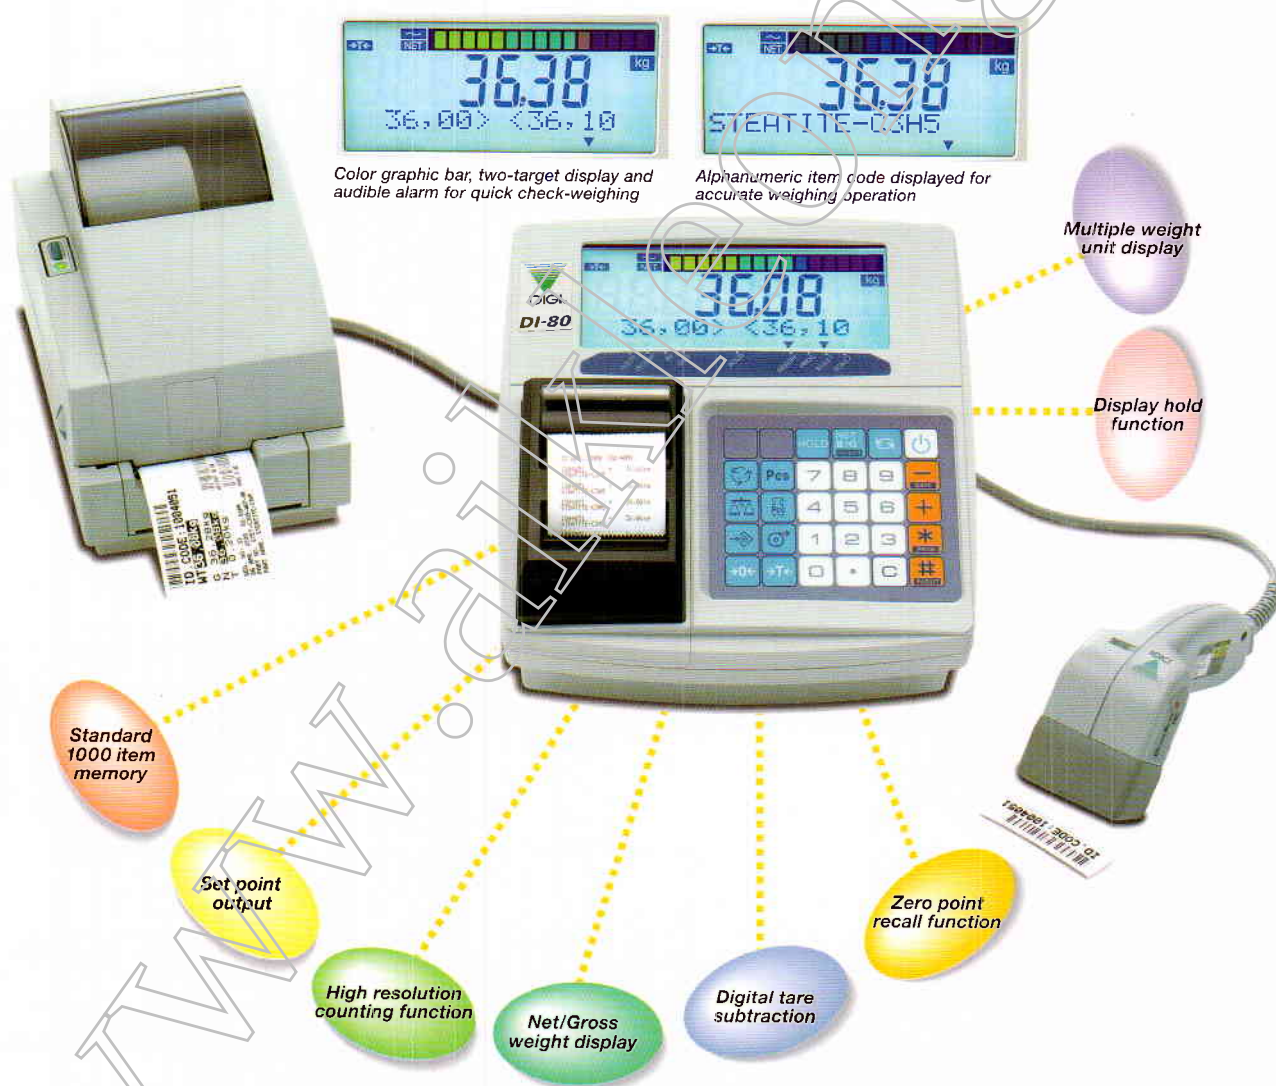

A Wide Range Of Weighing Operations

Digital Indicator

DI-80

Specifications

Analog section

Input sensitivity:	0.4mV/V to 4.0mV/V
Zero adj. range:	-10% to +100% of F.S.
Load cell excitation:	12VDC
A/D conversion rate:	30 times/sec. at 1mV/V output
Temp. Coefficient:	ZERO: $\pm(0.2\text{mV} \pm 5\text{ppm of zero voltage})/^{\circ}\text{C}$ TYP SPAN: $\pm 5\text{ppm}/^{\circ}\text{C}$ TYP
Non linearity:	0.008 % of F.S. or less
Number of load cells:	Max. 8 load cells (350)
Remote sensing function	

Digital section

Type:	LCD display with color graphic bar and backlight
Display:	Segment display: 6 digits (letter height: 26 mm) Dot matrix display: 17 digits (alpha-numeric) 1, 2, 5, and 10
Display division:	00,0000 to 0000000
Decimal point location:	Zero, Net, Gross, Stable, Pcs, oz, dwt, lb, g, kg, Battery low
Indicator marks:	1000 items (or 2000 items)
Memory:	Item code No., Item name, Item number, Tare weight, Unit weight, Inventory, Set point data 1 to 4
Programmable data per item:	Date/time, Code No., Item name, Weight (or quantity), Total weight (or total quantity), and number of trans- actions
Printing items: (optional built-in thermal printer)	

Connectors on Rear panel:

- Standard I/F
 - Scale interface: Amphenol 14 Pin
 - RS-232C: Din 8 Pin
 - Set point output: Mini Din 8 Pin
- *RS-232C/RS-485 board
 - RS-232C: Din 8 Pin
 - RS-485: 2 x Modular Jack (RJ45 8 pin)
- *Analogue output board
 - Analogue output: Din 5 Pin, 4-20mA or 0-5V (or 0-10V), 11 bit resolution

Note: Either one is available for use.*

General

Internal resolution:	Up to 1/1,000,000
Display resolution:	Up to 1/30,000 **1/7,500
Power source:	A/C adapter (12VDC, 1.25A) Battery (6 x D cell) or Rechargeable battery
Power consumption:	4.6W (1.1W backlight off, 6W with printer)
Operating temperature:	-10°C to 40°C **0°C to 30°C
Operating humidity:	85%RH Max. (Non-condensing)
Net weight:	3.2kg/7.0lb
Dimensions:	240(W) x 255(D) x 153(H) mm 9.45(W) x 10.03(D) x 6.02(H) inches

***subject to local regulation*

Model Variation

- DI - 80, 128KB
- DI - 80, 256KB

Options

- Built-in thermal printer unit
(Paper roll 50mm diameter, Paper width 58mm)
- *RS-232C/RS-485 board
- *Analogue output board
- Fixed stand block for DIGI Scale Platforms
- Desk top bracket
- Wall mount bracket

Note: Either one is available for use.*

Peripherals

- Bar code printer
- Bar code scanner



*Meets or exceeds the requirements of OIML Class III.
*Specifications are subject to change without notice.

Teraoka Seiko Co., Ltd.

13-12 Kugahara 5-chome, Ohta-ku,
Tokyo 146-8580
Japan
TEL: +81-3-3752-2131
FAX: +81-3-3752-2001
EMAIL: info@hq.digi.co.jp
WEBSITE: <http://teraoka.digi.co.jp/index.nsf>

Teraoka Weigh-System Pte. Ltd.

4 Leng Kee Road #05-03/04/05
SIS Building Singapore 159088
TEL: +65-472-2996
+65-378-5388 (Sales)
FAX: +65-472-2869
EMAIL: sales@teraoka.com.sg
WEBSITE: <http://www.teraoka.com.sg>