



◎ FEATURES

- Protection class IP67
- Miniature dimension
- Compression applications
- Application for limited space
- Tap included in bottom side


◎ Material

- Stainless steel construction

◎ Cable

- Braided shield 4-wire round cable with PVC-jacket

◎ DIMENSIONS

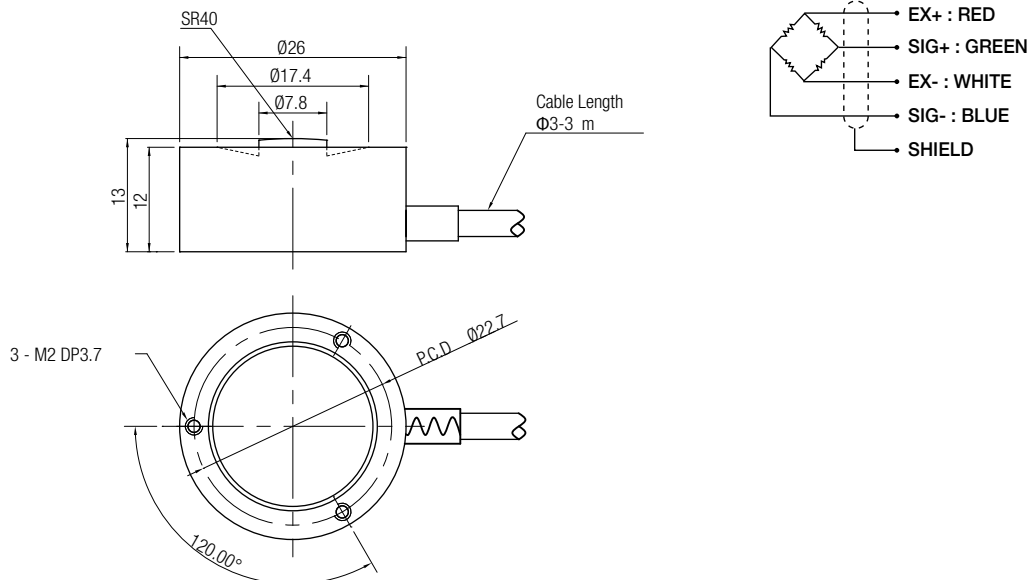

◎ SPECIFICATIONS

Max. Capacity		kgf	50, 100, 200, 500, 1tf, 2tf, 3tf
Rated output		mV/V	1.0 ± 0.1
Zero balance		mV/V	0.0 ± 0.1
Combined error		%RO	0.5
Repeatability		%RO	0.1
Creep(30min.)		%RO	0.5
Temperature effec on			
	Zero value	%RO/10°C	0.028
	Output value	%RO/10°C	0.015
Excitation	Recommended	V	10
	Maximum	V	15
Resistance	Input	Ω	400 ± 20
	Output	Ω	350 ± 3.5
	Insulation	MΩ	> 2,000 @ 50V DC
Compensated temp. range		°C	-10 ~ +40
Operating temp. range		°C	-30 ~ +80

* Specifications are subject to change without notice