


• DIMENSIONS

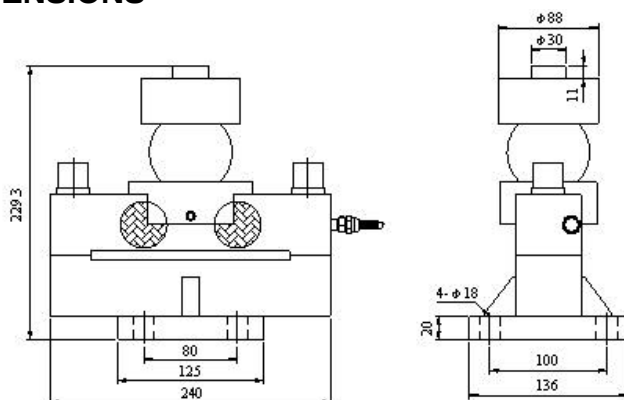

主视
(Front View)

右视
(Right View)

Red = Exc +
Black = Exc -
Green = Sig +
White = Sig -

• SPECIFICATION

Capacity		tf	20, 25, 30, 40
Rated Output		mV/V	2.0 ± 0.005
Zero Balance		mV/V	0.0 ± 0.020
Accuracy Class		OIML	C3
Zero balance		% R.O.	0.02
Hysteresis		% R.O.	0.02
Combined Error		% R.O.	0.02
Repeatability		% R.O.	0.02
Creep for 30min.		% R.O.	0.015
Return for 30min.		% R.O.	0.015
Resolution		-	<1/5000
Division		mV/V	0.0004
Temperature Effect on	-Zero Value	%/10°C	± 0.02 %
	-Output Value	%/10°C	± 0.02 %
Excitation	-Recommended	V	5-12
	-Maximum	V	15
Resistance	-Input	Ω	740 ± 15
	-Output	Ω	700 ± 5
	-Insulation	μΩ	>5000
Compensated Temperature Range		°C	-10 to +40
Operating Temperature Range		°C	-30 to +70
Safety Overload		% R.L	150 R.L
Ultimate overload		% R.L	200 R.L
Protection class			67/68
Material			Steel Alloy
Cable		m	13