

Type AM-1241 Load Cell



Short Description



- Aluminium-alloy IP65 single point load cell
- Colorless anodized
- Suitable for pricing scales, bench scales, etc.
- Maximum platform size: 450 x 450 mm



Test certificate no. TC7868 Revision 1
C of C no R60/2000-NL1-12.52



Certificate no. 11-001

Available Models

P/N	Capacity	Accuracy	Full Article Description
72209980	50kg	C3/C4	AM-1241-C3/C4-50kg-3G
72209981	60kg	C3/C4	AM-1241-C3/C4-60kg-3G
72209982	100kg	C3/C4	AM-1241-C3/C4-100kg-3G
72209983	150kg	C3/C4	AM-1241-C3/C4-150kg-3G
72209984	200kg	C3/C4	AM-1241-C3/C4-200kg-3G
72209985	250kg	C3/C4	AM-1241-C3/C4-250kg-3G
72209986	300kg	C3/C4/C5	AM-1241-C3/C4-300kg-3G

Type AM-1241 Load Cell

Technical Specifications AM-1241


Accuracy Class		OIML R60 C3	OIML R60 C4	OIML R60 C5
Output Sensitivity (= FS)	mV/V	2.0 ± 0.2		
Maximum Capacity (Emax)	kg	50, 60, 100, 150, 200, 250, 300		
Max. Number of Load Cell Intervals	nLC	3000	4000	5000
Ratio of min. LC Verification Interval	Y = Emax / vmin	10000	15000	20000
Combined Error	%FS	≤± 0.0230	≤± 0.0175	≤± 0.0140
Minimum dead load	Of Emax	0%		
Safe overload	of Emax	150 %		
Ultimate overload	of Emax	300 %		
Zero balance	of FS	< ± 2.0 %		
Excitation, recommended voltage	V	5 ~ 12		
Excitation maximum	V	18		
Input resistance	Ω	406 ± 6		
Output resistance	Ω	350 ± 3.5		
Insulation resistance	MΩ	≥5000 (at 50VDC)		
Compensated temperature	°C	-10 ~ +40		
Operating temperature	°C	-35 ~ +65		
Storage temperature	°C	-40 ~ +70		
Element material		Aluminium		
Ingress Protection (acc. to EN 60529)		IP65		
Recommended torque on fixation bolts	Nm	M6:10		

Wiring

Features:


Shielded, 4 conductor cable.
Cable diameter: Ø5.3mm.
Standard cable length: 3m.
Shield connected to element.
Cable jacket in PVC.

Mode of Connection




Type AM-1241 Load Cell

Dimensions in mm

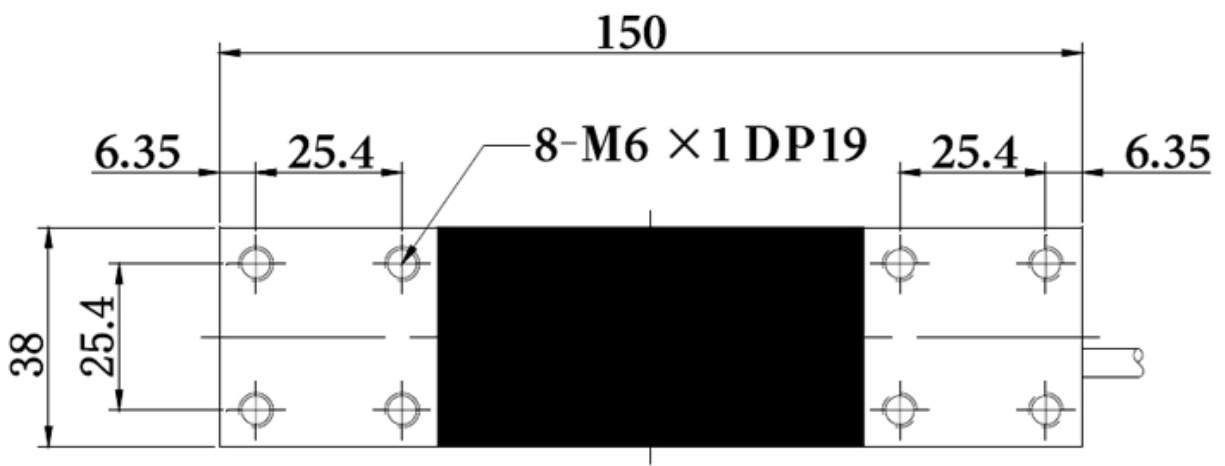

(Top View)

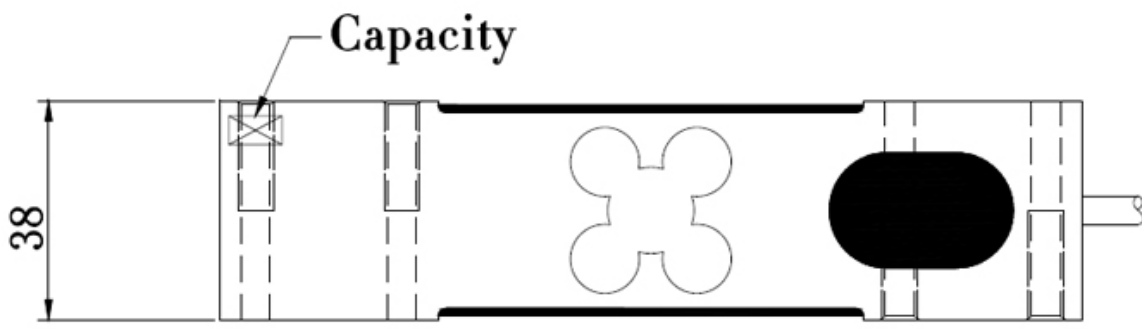

(Front View)